

PRODUCT SPECIFICATION

ALKALINE AA SIZE BATTERY

Type Designation: LR6UD/AA

Prepared by : 裴婉

Checked by : 張冠

Approved by : 裴婉

Issued Date : 2019-01-01

Immense Power Pvt Ltd.

Address: 1, DDA COMMERCIAL COMPLEX CHITRA VIHAR VIKAS MARG, Delhi- 92.

Tel: 0091-11-22016083 0091-11-22015963

E-mail: sales@immense.in

Website: www.immense.in

RECORD OF REVISION

TYPE DESIGNATION: LR6/AA

REV. No.	REASON	CONTENTS	DATE	PREPARE	REMARK
0	Initial Released		2019-01-01	Xuan.Q	

Model No.: LR6UD

Document No.: JSS133.2019

1. Scope:

This specification is applicable to Immense alkaline cell, LR6 Ultra Digital (No mercury and Cadmium added) distributed by Immense Power Pvt Ltd.

2. Law & Regulation Compliances:

This product complies with EU's battery directive (2006/66/EC).

Packaging materials comply with EU's directive on packaging materials and waste (94/62/EC)

3. General:

Type designation

IEC/ JIS	LR6
ANSI	15A

Chemical system: Zn/KOH-H₂O/MnO₂


Nominal voltage: 1.5 V

Weight: Approximate 23.5g

Dimension (mm)

The dimensions shall be in accordance with the below figures both prior to and after service output test.
Measuring equipment shall be with an accuracy $\pm 0.05\text{mm}$ at least.

/	min	max
Φ	13.9	14.4
A	49.9	50.4
C	9.0	9.4
F	5.0	5.4
G	1.2	1.7

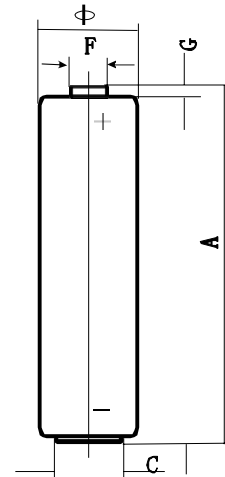

Capacity: Approximate 2950mAh (10mA, 24h/d, 20°C, e.v.= 0.8V)

Operation temperature : -18°C~50°C

Recommend storage temperature : Not exceed 30°C

Model No.: LR6UD

Document No.: JSS133.2019

4. Appearance

The battery visually inspected by unaided eye 30cm away from battery. The battery shall be free from dents, scratch, rust and extruded internal compounds, such as sealing compounds and etc, and serious displacement of artwork. Appearance defects shall not be observed that may adversely affect actual use or performance of batteries.

5. Electrical Characteristics

Unless otherwise stated, all measurements are to be performed at a **Standard Environment** of

20 ± 2°C
55 ± 20% RH.

All samples are normalized for 8 hours at least at the above environment prior to measurement. The digital voltmeter (DCM) is with the precision of 1mV (internal resistance not less than 1 Megohm). The load resistance of the total circuit is accurate within ±0.5% of the specified value.

Open circuit voltage and closed circuit voltage (Load resistance 3.9Ω, 0.3S)

/		OCV(V)	CCV(V)	S.C.(A) (reference)
Initial	Min	1.57	1.42	8.0
	Normal	1.60	1.52	15.0
Stored 1 year	Min	1.55	1.39	6.0
	Normal	1.58	1.48	10.0

Service output

Load	10Ω	1000mA	1.5w/ 0.65w	1000 mA	3.3Ω	250mA	3.9Ω	100mA	24Ω	43Ω	
Test mode	24h/d	24h/d	2s/28s 5min/h	10s/m 1h/d	4m/h 8h/d	1h/d	1h/d	1h/d	15s/m 8h/d	4h/d	
End voltage	0.9V	0.9V	1.05V	0.9V	0.9V	0.9V	0.8V	0.9V	1.0V	0.9V	
Unit	h	m	pulse	pulse	m	h	h	h	h	h	
Applications	Reference	Reference	Digital still camera	Photo flash	Portable lighting	CD/ Electronic games	Motor/ toy	Digital audio	Remote control	Radio/ Clock	
Initial	MAD	19.0	46	87	470	310	7.3	7.3	21.5	43.5	90.0
	Normal	19.8	57	105	520	340	8.0	7.7	23.0	45.5	93.0
Stored 1 year	MAD	18.6	41	75	390	290	7.0	7.0	21.0	42.5	88.0
	Normal	19.2	47	93	460	310	7.6	7.4	22.0	44.5	91.0

m: minute h: hour d: day

Remark: 1) The initial discharge test shall commence within 30 days of manufacture. During stored period, the cells shall be stored under room temperature conditions.

- 2) Lot release service output test is conducted by 10Ω continuous discharging to 0.9volts
- The batteries shall not leak during the service life test before the end voltage reached.

Model No.: LR6UD

Document No.: JSS133.2019

6. Leakage Resistance

Over discharge leakage test

Test conditions: 20±2°C & RH 60±15%, 10Ω continuous discharge 48h.

Number of test samples: 9 batteries

Requirement: No visible leakage; No explosion.

High temperature leakage test

Test conditions: store 20 days under 60±2°C, then store 4~24h under standard environment.

Number of test samples: 24 batteries

Requirement: No visible leakage; No explosion.

7. Security Characteristics

User Drop Test

This test simulates the situation when a battery is accidentally dropped.

Test conditions: Undischarged test batteries shall be dropped from a height of 1 m onto a concrete surface. Each test battery shall be dropped six times, twice in each of the three axes. The test batteries shall be stored for 1 h afterwards.

Number of test sets: 5 batteries

Requirement: No fire, No explosion or leakage after 1hour OCV maintenance rate is 95% over

Short-circuit explosion-proof characteristics

This test simulates an external short circuit of a battery during daily handling of batteries.

Test conditions: Positive and negative terminals of an undischarged battery shall be connected directly. The circuit shall be completed for 24 h or until the battery case temperature has returned to ambient. The resistance of the inter-connecting circuitry shall not exceed 0,1 Ω.

Number of test samples: 5 batteries

Requirement: No fire or explosion; Leakage is allowable.

Incorrect installation

This test simulates incorrect installation of a battery in a series application.

Test conditions: 4 undischarged batteries are used per test. 3 batteries are placed correctly in series; the 4th battery is reversed with respect to polarity. The circuit is maintained until venting occurs or the reversed battery temperature has returned to ambient.

Number of test sets: 5 (20 batteries)

Requirement: No fire or explosion; Leakage is allowable.

8. Expiry Date:

5 years

9. Expiry Date Marking:

Unless otherwise specified, each battery will carry a manufacturing date code followed by month and year of manufacturing for domestic and manufacturing date code followed by month and year of expiry for export. (Shelf life 5 years)

For private label, can mark according to customer's requirements.

Model No.: LR6UD

Document No.: JSS133.2019

10. Packaging Requirements

The total of heavy metal lead, cadmium, mercury, and hexavalent chromium concentration shall not exceed 100 ppm in Packaging materials and printing inks. Ozone depleting substances (ODS) shall not be used in the manufacturing of any packaging.

The printing on each cell label is legible and permanent. Label defects, if any, shall conform to mutually agreed upon limit samples.


It is recommended that packaging for shipment and sales according with Packaging Specification of Immense alkaline cell. For example, 2pcs cells in a shrink, 12 shrinks in a display box, and 30 display boxes in a final outer carton. Flow chart as following:

Otherwise packaging for shipment and sales shall conform to the mutually agreed to Packaging Specification of the designated customers.

Model No.: LR6UD


Document No.: JSS133.2019

1




2pcs-shrink(PVC or PET)

2

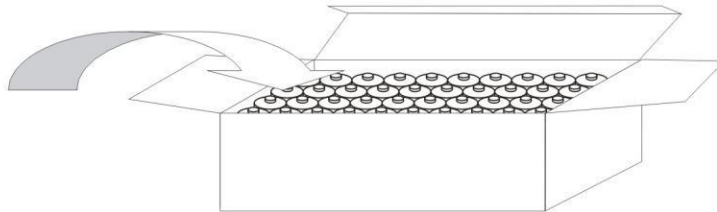

4x10 pcs in a display box

3

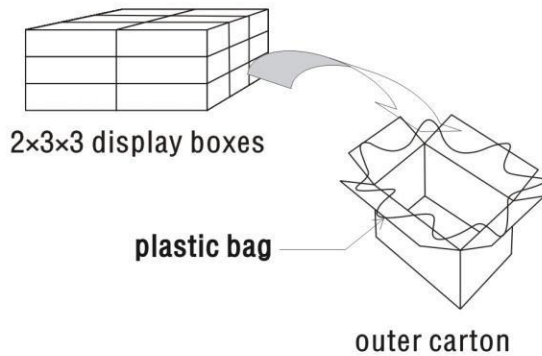


2x3x3 display boxes

plastic bag

outer carton


4

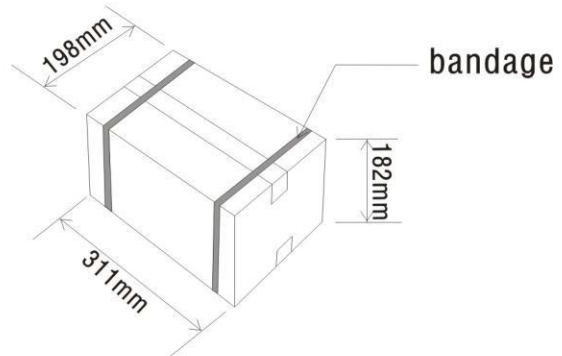

bandage

Gross weight: about 17.6kg

5

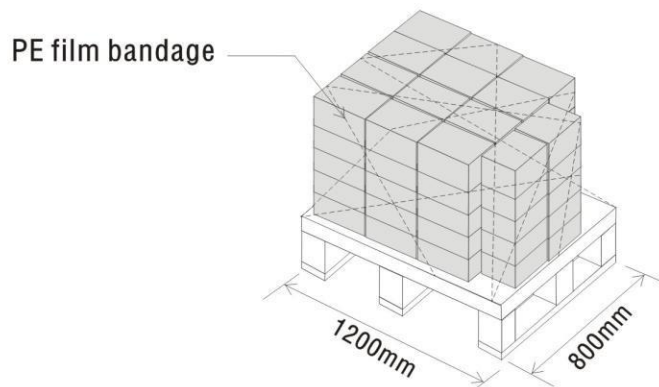

PE film bandage

1200mm

800mm

(3x4+2) x5 outer boxes

Model No.: LR6UD

Document No.: JSS133.2019

11. Material Safety Data Sheet

Composition /Information on Ingredients:

Chemical Nature: Alkaline zinc-manganese dioxide batteries

MATERIALS	APPROXIMATE PERCENT OF TOTAL WEIGHT (%)	MATERIALS	APPROXIMATE PERCENT OF TOTAL WEIGHT (%)
Manganese Dioxide (MnO ₂)	42.6	Brass	2.4
Zinc Powder (Zn)	16.1	Fe	15.7
Water (H ₂ O)	12.2	Ni-plating	0.3
Potassium Hydroxide (KOH)	5.2	Fiber	0.9
Carbon	3.0	Nylon-66	1.6

Chart 1. Discharge diagram

